



HV613 SBA


Sales Proposal For:
CITY OF WEST ALLIS

Presented By:
LAKESIDE INTL, LLC

Prepared For:
CITY OF WEST ALLIS
brett wollenzien
7525 W GREENFIELD AVE
WEST ALLIS, WI 53214-
(414)302 - 8300
Reference ID: N/A

Presented By:
LAKESIDE INTL, LLC
Patrick McNamara
11000 W SILVER SPRING RD
MILWAUKEE WI 53225 -
(414)353-4800

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

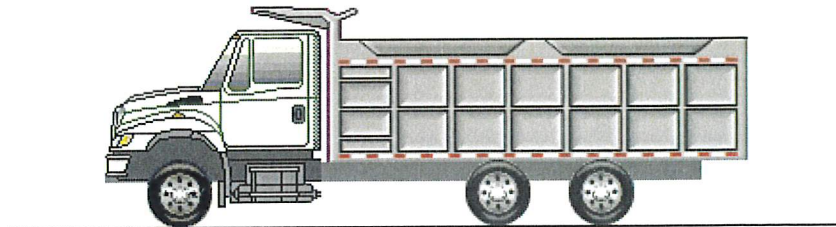

Model Profile
2024 HV613 SBA (HV613)

AXLE CONFIG:	6X4
APPLICATION:	Construction Dump
MISSION:	Requested GVWR: 66000. Calc. GVWR: 66000. Calc. GCWR: 110000 Calc. Start / Grade Ability: 24.56% / 2.39% @ 55 MPH Calc. Geared Speed: 78.5 MPH
DIMENSION:	Wheelbase: 187.00, CA: 119.90, Axle to Frame: 79.00
ENGINE, DIESEL:	{International A26} EPA 2021, 390HP @ 1700 RPM, 1450 lb-ft Torque @ 900 RPM, 2100 RPM Governed Speed, 390 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 5-Speed with Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-164EH} Single Reduction, Standard Width, 46,000-lb Capacity, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 4.30
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 315/80R22.5 Load Range L HSC 3 (CONTINENTAL), 481 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, TANDEM:	{Chalmers 854-46H} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with (8) Torque Rods, Restrictor Cans
PAINT:	Cab schematic 100WN Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
HV61300	Base Chassis, Model HV613 SBA with 187.00 Wheelbase, 119.90 CA, and 79.00 Axle to Frame.
1570	TOW HOOK, FRONT (2) Frame Mounted
1AND	AXLE CONFIGURATION {Navistar} 6x4
	<u>Notes</u> : Pricing may change if axle configuration is changed.
1CAJ	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.437" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL
1LNR	BUMPER, FRONT Swept Back, Steel, Painted 0001 Canyon Black, Heavy Duty
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille
1WHP	WHEELBASE RANGE 183" (465cm) Through and Including 248" (630cm)
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
3AHU	SUSPENSION, FRONT, SPRING Multi-Stage Parabolic Taper Leaf, Shackle Type, 20,000-lb Capacity, with Shock Absorbers
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6
4732	DRAIN VALVE {Berg} with Pull Chain, for Air Tank
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System
4EBT	AIR DRYER {Bendix AD-IP} with Heater
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake
4LAG	SLACK ADJUSTERS, FRONT {Gunitex} Automatic
4LGG	SLACK ADJUSTERS, REAR {Gunitex} Automatic
4SPM	AIR COMPRESSOR {Bendix BA-921 Head Unload} 15.9 CFM
4VKB	AIR DRYER LOCATION Mounted Inside Right Rail, Back of Cab
4VKJ	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Left Rail, Back of Cab, Perpendicular to Rail
4WBX	DUST SHIELDS, FRONT BRAKE for Air Cam Brakes
4WDM	DUST SHIELDS, REAR BRAKE for Air Cam Brakes
4XDL	BRAKES, FRONT {Bendix Spicer ES-165-6X} Air S-Cam Type, Heavy Duty Fabricated Spider, Fabricated Shoe, Single Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity
4XDM	BRAKES, REAR {Bendix Spicer ES-165-7X} Air S-Cam Type, Heavy Duty Fabricated Spider, Fabricated Shoe, Single Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle

<u>Code</u>	<u>Description</u>
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type
5708	STEERING COLUMN Tilting
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power
6DGU	DRIVELINE SYSTEM {Dana Spicer} SPL250 Main Driveline with SPL170 Interaxle Shaft, for 6x4
7BEU	AFTERTREATMENT COVER Aluminum
7BLW	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7SDX	ENGINE COMPRESSION BRAKE Omit
7WBA	TAIL PIPE (1) Turnback Type, Bright
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel
7WCR	EXHAUST HEIGHT 10' 11"
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8541	HORN, ELECTRIC (2) Disc Style
8GGG	ALTERNATOR {Delco Remy 36SI} Brushless, 12 Volt, 165 Amp Capacity, Pad Mount, with Remote Sense
8HAU	BODY BUILDER WIRING INSIDE CAB; Includes Sealed Connectors for Tail/Amber, Turn/Marker/Backup/Accessory, Power/Ground, and Stop/Turn
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RGA	2-WAY RADIO Wiring Effects; Wiring with 20 Amp Fuse Protection, Includes Ignition Wire with 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8RPP	ANTENNA Shark Fin, Roof Mounted
8RPT	RADIO AM/FM/WB/Clock/USB Input/Auxiliary Input
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8TPR	STOP, TURN, TAIL & B/U LIGHTS {Weldon} Multi-Function LED Lamp, Mounted Outside Rails, Includes LED License Plate Light
8VUL	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Left Side Back of Cab

<u>Code</u>	<u>Description</u>
8VZR	SWITCH, BODY CIRCUITS, MID with Remote Power Module Mounted in Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs, Max 20 amp per Channel, Max 80 amp Total, Includes 1 Switch Pack with Momentary Switches
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time
8WJV	BATTERY DISCONNECT SWITCH {Joseph Pollak} for Cab Power Disconnect Switch, Disconnects Power to Power Distribution Center (PDC), Does Not Disconnect Charging Circuits, Lever Operated, Cab Mounted
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on
8WTL	STARTING MOTOR {Delco Remy 39MT} 12 Volt, Gear Reduced, with Thermal Over-Crank Protection
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XHR	POWER SOURCE, ADDITIONAL Auxiliary Power Outlet (APO) with USB Port, Located in the Instrument Panel
8XNY	HEADLIGHTS Halogen
9585	FENDER EXTENSIONS Rubber
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HBM	GRILLE Stationary, Chrome
9HBN	INSULATION, SPLASH PANELS for Sound Abatement
9WBK	FRONT END Tilting, Fiberglass, with Three Piece Construction, Includes Long Hood
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WN"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10AGB	COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360
10JPA	CUSTOMER IDENTITY for Sourcewell
10SLV	PROMOTIONAL PACKAGE Government Silver Package
10WBS	KEYS - ALL ALIKE, ADDITIONAL 2 Keys
10WKN	KEYS - ALL ALIKE, ID I-1624 Compatible with Z-250
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12BEU	ENGINE, DIESEL {International A26} EPA 2021, 390HP @ 1700 RPM, 1450 lb-ft Torque @ 900 RPM, 2100 RPM Governed Speed, 390 Peak HP (Max)
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed

<u>Code</u>	<u>Description</u>
	<u>Includes</u> : FAN Nylon
12VAG	AIR CLEANER Single Element, with Integral Snow Valve and In-Cab Control
12VJA	EMISSION, CALENDAR YEAR {International A26} EPA, OBD and GHG Certified for Calendar Year 2022
12VYL	ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use
12WEG	COLD STARTING EQUIPMENT Automatic; with Engine ECM Control
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted
12WZE	CARB IDLE COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations
12XBD	RADIATOR Aluminum, Welded, Cross Flow, Front to Back System, 1292 SqIn, with 1008 SqIn Charge Air Cooler
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber
12XBR	BLOCK HEATER, ENGINE {Phillips} 120V/1150W
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door
12XCT	CARB EMISSION WARR COMPLIANCE for International A26 Engines
13AUT	TRANSMISSION, AUTOMATIC {Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 5-Speed with Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission
13WEY	OIL COOLER, AUTO TRANSMISSION {Modine} Stainless Steel, Water to Oil Type
13WGK	TRANSMISSION COOLER HOSES Stainless Steel
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming
13XAT	PTO LOCATION Dual, Customer Intends to Install PTO at Left Side and/or Top of Transmission
14HRC	AXLE, REAR, TANDEM {Meritor RT-46-164EH} Single Reduction, Standard Width, 46,000-lb Capacity, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 4.30
	<u>Notes</u> : Axle Lead Time is 45 Days
14UZU	SUSPENSION, REAR, TANDEM {Chalmers 854-46H} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with (8) Torque Rods, Restrictor Cans
14WMK	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 65 thru 89.99 Pints
15924	FUEL TANK STRAPS Bright Finish Stainless Steel

<u>Code</u>	<u>Description</u>
15DYP	DEF TANK 9.5 US Gal (36L) Capacity, Frame Mounted Outside Left Rail, Under Cab
15LLP	LOCATION FUEL/WATER SEPARATOR Mounted Inside Left Rail, Back of Cab
15LPR	FUEL/WATER SEPARATOR {Racor 6600} 12 VDC Electric Heater, Includes Pre-Heater, Fuel Heated with Fuel Blender Valve, with Sight Bowl, Includes Water-In-Fuel Sensor
15SRE	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 50 US Gal (189L), Mounted Left Side, Under Cab
16030	CAB Conventional, Day Cab
16BAM	AIR CONDITIONER with Integral Heater and Defroster
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer
	<u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16LJL	SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Cloth, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Seat Back Adjustment, Rubber Bellows
16SEE	GRAB HANDLE, EXTERIOR Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left Side at B-Pillar
16SMR	SEAT, PASSENGER {National} Non Suspension, High Back with Integral Headrest, Cloth, with Fixed Back, with Under Seat Storage
16SNT	MIRRORS (2) Aero Pedestal, Power Adjust, Heated, Turn Signals, Black Heads and Arms, 6.5" x 14" Flat Glass, Includes 6.5" x 6" Convex Mirrors, for 102" Load Width
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"
16VBT	CAB SOUND INSULATION Includes Dash Insulator and Engine Cover Insulator, Premium Floor mat, and Sound Dampening Patches
16VKB	CAB INTERIOR TRIM Classic, for Day Cab
	<u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16VSL	WINDSHIELD Heated, Single Piece
16WBY	ARM REST, RIGHT, DRIVER SEAT
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature
16WSK	CAB REAR SUSPENSION Air Bag Type

<u>Code</u>	<u>Description</u>
16WSL	MIRROR, CONVEX, HOOD MOUNTED {Lang Mekra} (2) Right and Left Sides, Black 7.5" Sq.
16XJP	INSTRUMENT PANEL Wing Panel
16XTM	ACCESS, CAB Aluminum, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab or Sleeper Cab
27DUL	WHEELS, FRONT {Accuride 29300} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs
29PBA	PAINT IDENTITY, FRONT WHEELS Disc Wheels; with Vendor Applied Black Powder Coat Paint
29PBB	PAINT IDENTITY, REAR WHEELS Disc Wheels; with Vendor Applied Black Powder Coat Paint
29WLK	WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil
7382135444	(8) TIRE, REAR 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
7792545438	(2) TIRE, FRONT 315/80R22.5 Load Range L HSC 3 (CONTINENTAL), 481 rev/mile, 68 MPH, All-Position

Services Section:

40127	WARRANTY Standard for HV513, HV613 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2030A
-------	---

Body/Allied Equipment

<u>Code</u>	<u>Description</u>
1	Casper's Equipment

Goods Purchased

<u>Code</u>	<u>Description</u>
	Detail
	Floor Mats
	Title and Fees
	0040PYU - SRV CONTRACT, EXT ENGINE {Navistar} To 60-Month/100,000 Miles
	Wing Window
	Stainless Steel Transmission Bolts

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Net Sales Price:		\$271,019.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

We do not yet have 2024 or later Sourcewell pricing available to us. This proposal was written using 2023 Sourcewell pricing. The final price will vary depending on production date, additional surcharges and/or freight increases. Your representative will reach out to you as soon as the new model year pricing becomes available.

Navistar International Sourcewell Contract #060920-NVS

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

**Appleton**

700 Randolph Drive
Appleton, WI 54913
Phone: (920) 687-1111
Fax: (920) 687-1122

Milwaukee

12655 W. Silver Spring Rd
Butler, WI 53007
Phone: (262) 544-5404
Fax: (800) 261-0383

Account: City of West Allis
Name: _____
Address: 6300 W Mc Geoch Ave
West Allis WI 53219

Date: 7/7/2022
Email: _____
Phone: (414)302-8807
Note: Revised

**** Sales Quote ******A. Force America Hydraulic System**

1. 897 series constant mesh PTO to fit 400 series Allison transmission
2. TXV92 load sense pump
3. Add-A-Fold valve in stainless steel enclosure to operate
 - a. Single acting hoist
 - b. Double acting plow lift
 - c. Double acting plow angle
 - d. Auger
 - e. Spinner
 - f. Pre-wet
4. 30 gallon stainless steel reservoir
5. Low oil level/ high oil temp warning to show up on display
6. Patrol Commander Ultra-joystick controls
7. SSC6100 spreader control for closed loop operation
8. Body up light to show in display
9. Plow coupler drain valve installed for plow angle hoses
10. Stainless steel tubing with short whip hoses used for long runs
11. Installed complete

B. Henderson 14' Mark E Heavy Duty 201 Stainless Steel Body

1. 14' long x 84" I.D., 60" front, tapering to a 52" tailgate
2. Uni-body design (no crossmembers)
3. 8" I-beam longitudinal (no splices)
4. One piece seven (7) gauge 201 stainless steel 110,000 psi sides and front head sheet
5. One piece 1/4" AR400 / 180,000 psi tensile strength seamless floor with 5" side to floor radius (one piece with floor not a welded in joiner)
6. Dirt shedding boxed top rail
7. Ten (10) gauge 201 stainless steel lower rub rails
8. Two (2) full length weld on horizontal side brace
9. Seven (7) gauge 201 stainless steel rear corner posts
10. Six (6) panel seven (7) gauge 201 stainless steel outer tailgate sheet has full perimeter boxing with two (2) vertical and one (1) horizontal ten (10) gauge weld on 201 stainless steel braces, tailgate latches are flame cut steel and are mounted to a 1/4" steel reinforcing plate attached to the body by continuous seam welding for extra strength and reliability, 1 1/4" upper and lower greaseable pins, greaseable lower latches
11. Body chemically cleaned with phosphate solution, natural 2B stainless steel finish with underside and hoist mounting cradle painted black
12. G3-130-5-3 single cylinder double acting, non-inverted trunnion mount, nitrided telescopic hoist, N.T.E.A. class 90
13. Factory supplied air trip tailgate release at rear (brake chamber) style, over center type
14. Stainless steel cabsheild with (2)oval light holes in the front and (1) oval light hole on each side for warning lights
15. Two steps at driver side front and passenger side front
16. Poly fenders over drive tires
17. Roll Rite electric tarp with tension bows and vinyl tarp material
18. One (1) year body warranty
19. Installed complete



C. Henderson FSH II Stainless Steel Material Spreader

1. Inside length; 12' width; 84" side height; 56"
2. Capacity (12') 9.7 cubic yards struck
3. 45° sloped sides, 18° sloped front, 9° rear slope, 10 ga. 304 SS continuous weld construction
4. Top edge of hopper is formed "J" channel 2" x 7/8"
5. 7 ga. 304 SS bolt-in replaceable floor
6. 7 ga. 304 SS long sills, continuous welded to side sheet
7. 7 ga. 304 SS cross sills, welded to side supports
8. ¼" x 2" formed 304 SS lift hooks on each corner
9. Single 7" auger
10. Hydraulic motor mounted directly to gearcase
11. Four position 304 SS telescoping chute
12. Two 304 SS baffles positioned to direct flow of material onto spinner
13. Four overlapping 304 SS bottom spinner deflectors
14. 20" poly spinner disc
15. Spinner hydraulic motor mounts directly on top of spinner disc
16. Stainless steel storage stand with slanted legs (legs will be behind the spinner to protect it)
17. Guide wheels mounted to storage stand
18. Stainless steel latch bar kit
19. Stainless steel inverted Vee
20. Top screens with hydraulic interlock to prevent entrance into hopper while spreader is running
21. 304 SS spinner bypass chute allows unloading of material.
22. Spreader requires 17 GPM minimum / 23 GPM maximum at 1500 PSI
23. Rubber salt shields to prevent salt from falling into dump body
24. Bumper mounted to protect spinner
25. Metal spill shield mounted to front of spreader
26. High-pressure cleaned with phosphate solution to remove slag, splatter, oxide, and oil residue, natural stainless steel finish
27. Installed complete

D. Henderson Pre-wet System for V-box Spreader

1. Designed for 12' v-boxes spreaders
2. Hydraulic driven 4.6gpm pump
3. Two, 100 gallon poly tanks
4. Variable nozzle assembly
5. Stainless steel frame mount hardware
6. System flush kit
7. Installed complete

E. Universal Pin and Loop Hitch

1. Extendible fold down lift arm
2. 3 ½" x 10" double acting lift cylinder
3. 10" channel front bumper
4. Installed complete



F. Lighting and Electrical

1. ABL plow lights mounted to hood with stainless steel brackets
2. Oval LED stop/tail/turn lights mounted in rear corner posts
3. Oval LED back up lights mounted in rear corner posts
4. Oval LED amber warning lights facing rearward in rear corner posts
5. Oval LED amber warning lights facing outward in rear corner posts
6. Oval LED amber warning lights mounted in the cabshield (2) facing forward (1) mounted on driver and (1) mounted passenger side facing outward
7. 3 LED marker lights below hinge
8. LED marker lights facing outward in rear corner posts
9. Round LED stop/tail/turn lights mounted above rear hinge
10. Round back-up lights mounted above rear hinge
11. Clear LED flood light mounted to spreader to shine on spinner
12. Back-up alarm
13. Wiring for dump body connected inside a junction box mounted behind the cab
14. Installed complete

Total: \$142,324.00

**** 10% Sourcewell discount given for Henderson provided Equipment****

All Sales Tax and FET Tax will be added

Submitted by: *Andy Jorgensen*

Quote firm 30 days

Terms: Net 30

By signing below, I agree that I have read, understood, and will comply with the terms of this quote.

Quote accepted by: _____

Title: _____

Date Accepted: _____

PO# _____

Thank You for the opportunity to submit our quote for your consideration

INTERNATIONAL TRUCKS 2022 AND 2023 MODEL YEAR COMMODITY SURCHARGES

Lakeside continues to see supplier disruptions and significant cost increases impacting our industry. Many of the major commodities used in production of our vehicles are seeing large increases including steel aluminum, copper, and resins. Despite our best efforts, global marketplace dynamics continue to increase our costs and international has absorbed these material cost increases to date. Competitors are seeing the same impact as we have seen with their recent announcements of price increases and surcharges. Therefore, International is implementing surcharges that will be applied on Model Year 2022 and 2023 Truck production.

As a result, prices quoted represent current pricing offered by International. We are aware that final price at delivery could be different due to pricing changes by Navistar.

We regret that 2024 calendar year pricing has not been released. However, once we receive 2024 pricing from Navistar, we will update everyone that is having their truck built in 2024 calendar year and send you updated proposal for your final approval.

Customer Signature and Date

Lakeside Signature and Date

