


S. 97 ST.

S. 96 ST.



1041

ST.

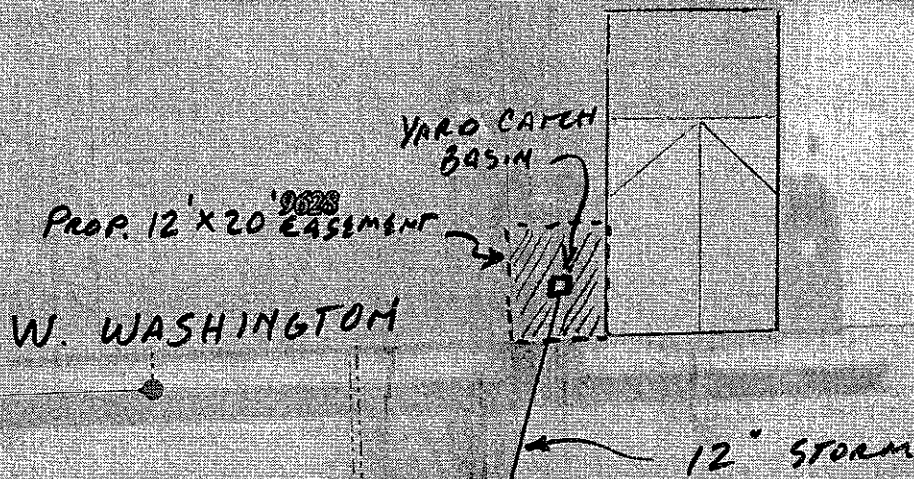

CONSTRUCTION ESTIMATE:

- 44 LIN. FT. OF 12" STORM @ \$75/FT. = \$3,300
- 1 YARD CATCH BASIN @ \$1,500/EA. = \$1,500
- 10 SQ. YDS. LAWN REPLACEMENT @ \$10/YD. = \$100
- 22 SQ. YDS. PAVEMENT REPLACEMENT @ \$45/YD. = \$990
- 50 SQ. FT. 5" WALK REPLACEMENT @ 7.50/FT. = \$375
- INCIDENTALS @ 10% ≈ \$625
- TOTAL = \$6,890